



PORTABLE POWER ACCESSORY GUIDE

GENERATORS | AIR COMPRESSORS | LIGHT TOWERS





**YOUR POWER,
AMPLIFIED**



PERFORMANCE YOU CAN TAKE ANYWHERE

When the job demands versatility and strength, Bobcat® portable power delivers. Our air compressors, generators and light towers are built tough to ensure you're equipped to handle any task, any time, anywhere. With advanced technology and industry-leading reliability, these products keep your projects powered and on schedule.

No matter where your work takes you, trust Bobcat to provide portable power solutions designed to keep you moving forward. Because when your challenges are bigger, your equipment should be too.

HOSE ASSEMBLIES

All hose assemblies are furnished with safety lanyards. Hose assemblies with bolt type clamps are furnished with safety lanyards and safety clips. The application should not exceed the established temperature rating of air hoses. Always inspect air hoses for damage before use. All worn or damaged air hoses should be replaced immediately.



Machine: PA185


HOSE ASSEMBLIES

SIZE	PART NO.	LENGTH	WPSI	DESCRIPTION
3/4"	35370832	50	300	2 Lug Fittings With Bolt Type Clamps
3/4"	35394006	50	300	Universal Fitting With Band Type Clamps (Construction Yellow)
3/4"	35370840	100	300	2 Lug Fittings With Bolt Type Clamps
3/4"	35370865	100	300	2 Lug Fittings With Bolt Type Clamps
3/4"	35394006	50	300	2 Lug Fittings With Bolt Type Clamps
1"	36892313	50	200	2 Lug AM-11 Couplings With Double Band Clamps

SAFETY LANYARDS & CLIPS

Safety lanyards are used for reducing the chance of injury in case a hose connection separates. Clips are also necessary to provide further protection to ensure the couplings will not become accidentally disconnected.

These whip check cables are designed to restrain hoses rated less than 200 psi.

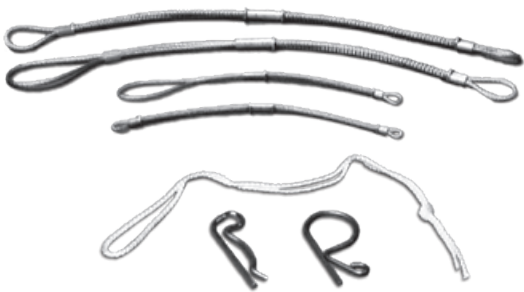

SAFETY LANYARDS AND CLIPS		
SIZE	PART NO.	DESCRIPTION
38"	35382076	Whip Check-Cable Hose to Hose 1/4" Cable for 1 1/2" to 3" Hose
38"	35382092	Hose to Tool Service 1/4" Cable for 1 1/2" to 3" Hose
20"	35382068	Whip Check-Cable Hose to Hose, 1/8" Cable for 1/2" to 1 1/4" Hose
20"	35382084	Hose to Tool Service 1/8" Cable for 1/2" to 1 1/4" Hose

DISCHARGE AIR MUFFLER

Silence your discharge air and lower your shop noise level. Manufactured to meet Bobcat specifications and identical to the muffler we use in our test area. Constructed of heavy-duty wire and casting components for longer life.

DISCHARGE AIR MUFFLER		
SIZE	PART NO.	PSI
1/2"	35370949	175
3/4"	35370956	175
1"	35370964	175
1 1/4"	35370972	175
1 1/2"	35370980	175
2"	35370998	175
3"	35371004	175
2"	36922789	250
3"	36922771	425



HOSE ACCESSORIES



AIR HOSE FITTINGS


Two lug couplings are recommended for virtually all types of pneumatic equipment. The universal head allows any fitting within range to be connected regardless of hose shank or thread size. They are also designed for use with safety clips to ensure the coupling will not become accidentally disconnected. See chart for specific psi ratings.

2 LUG HOSE FITTING

SIZE	PART NO.	PSI @ 70°F	DESCRIPTION
1/2"	35379072	150	Hose Ends
1/2"	35221910	150	Male NPT Ends
1/2"	35379148	150	Female NPT Ends
3/4"	35233220	150	Hose Ends
3/4"	35233014	150	Male NPT Ends
3/4"	35225945	150	Female NPT Ends
3/4"	35325976	—	Clamp 1-1/8" - 1-5/16" Hose OD
1"	35367028	150	Male NPT Ends
1"	35323633	150	Female NPT Ends
1 1/4"	35379171	150	Hose End
1 1/4"	35225655	150	Female NPT
2"	35379197	150	Hose Ends
2"	35379213	150	Female NPT Ends
—	35370170	—	Rubber Washers

NYLON TUBING AND FITTINGS (USED ON REGULATION LINES)

PART NO.	DESCRIPTION
35333715	1/4" Nylon Tubing (Sold By The Inch)
35356484	3/8" Nylon Tubing
35369339	Female 1/4 NPT X 3/8 Straight
35369347	Male 1/4 NPT X 3/8 Straight
35369354	Male 1/4 NPT X 3/8 Elbow
35369362	Male 1/4 NPT X 1/4 Elbow
35369370	Male 1/8 NPT X 1/4 Elbow
35369396	Male 1/8 NPT X 3/8 Tee
35369503	Male 1/4 NPT X 3/8 Tee
35370386	Male 1/8 NPT X 3/8 Elbow
35373976	Tee Run 1/4 NPT X 3/8
35369503	Tee Street 1/4 NPT X 3/8
35374859	Tee Street 1/8 NPT X 3/8

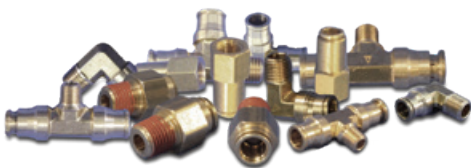


NYLON TUBING AND FITTINGS

Our nylon tubing comes in 2 sizes with a rating of 1000 psi @ 75°F. We also offer a variety of fittings depending on the application and tubing size.



AIR LINE LUBRICATORS WITH RELIEF VALVE

An inexpensive way to keep air tools operating at peak efficiency. Reduce costly repairs and downtime with an adjustable feed that allows adaptability to all climates and conditions.

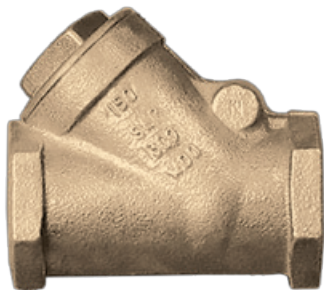

SWING CHECK VALVES

Specifically designed valves to prevent backflow of air and protect your compressor.

AIR LINE LUBRICATORS		
SIZE	PART NO.	CAPACITY
1 1/4" NPT	35356252	2-Quart
1 1/4" NPT	35255025	1-Quart
1" NPT	35364322	1-Pint
1" BSP	35371129	1-Pint
3/4" NPT	35364314	1/2-Pint
3/4" BSP	35371111	1/2-Pint
3/4" NPT	35364306	1/3-Pint
3/4" BSP	35371103	1/3-Pint
1" NPT	35371251	1-Quart
2 1/2" NPT	36874725	3-Gal.

AIR LINE LUBRICATOR SPARES	
PART NO.	DESCRIPTION
35609064	Filler Relief Cap With Relief Valve (fits all except 35371251)
35380989	Sight Glass W/O-Ring (fits all except 35371251)

SWING CHECK VALVES			
SIZE	PART NO.	PSI STREAMING RATE	MATERIAL
3/4"	95287637	150 lb.	Bronze
1 1/4"	95279667	150 lb.	Bronze



Machine: PA185V

HOSE ACCESSORIES



Machine: PA185

SAFETY CHECK VALVES

Designed for maximum performance and service within the correct CFM rating. The CFM output of a machine is the controlling factor affecting the proper operation of a safety check valve. Use only specific valves made to control the CFM range for proper performance. No single valve can properly handle all of the variable factors during normal service.

Each safety check valve is equipped with a spring to precisely control a limited range of compressor air output volume. Operating within this range, a safety check valve will react instantly and automatically to hose failure and accidental uncoupling, eliminating dangerous hose whip. Its tamper-proof construction is solid brass with stainless steel springs.



WHEN ORDERING A BOBCAT SAFETY CHECK VALVE:

- Determine the CFM rating of the compressor
- Always consider the size of the valve must be the same size as the air hose
- Max pressure rating 375PSIG

SAFETY CHECK VALVES

SIZE (NPT)	PART NO.	MACHINE CFM
3/4"	35364371	100-125
3/4"	35364389	145-155
1"	35363803	150-185
3/4"	35364397	160-185
1"	35364405	200-250
1"	35364413	300-325
1"	35364421	365-375
1 1/2"	35363829	365-375
1 1/2"	35364447	600-635
1 1/2"	35364454	750-850
2"	35363837	600-635
2"	35364462	750-850
2"	35364470	900-1050
2"	35364488	1050-1300
3"	35363845	1100-1300
3"	35364496	1600-1800

HITCH ADAPTERS

HITCH ADAPTERS

Multiple hitch options that allow for different towing options, on all machines, at the easiest convenience.



3" PINTLE EYE | 35605187

For compressors and generators compatible with bulldog hitch adapter




2" BALL COUPLER | 46656646

For compressors and generators compatible with bulldog hitch adapter



2" BALL HITCH | 35611748

For LSC light towers only

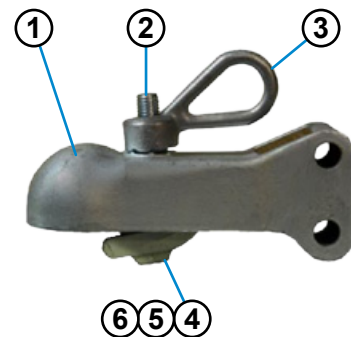

2" BALL HITCH | 36509073

For compressors and generators



Machine: PG50

SPARE PARTS

	PART NO.	DESCRIPTION
1	—	Body (Not Sold Separately)
2	35131465	Bolt
3	35131457	Loop Handle Nut
4	95081790	Lock Washer
5	35131481	Spring
6	35131499	Lip

BOBCAT AIREND OILS

ProTec™ compressor fluid is designed specifically for the high performance demands of Bobcat compressors up to 300 psi. Our proprietary formulation achieves superior performance and extends your equipment life while also providing excellent low-temperature performance and protection against high-temperature deposit formation.

- Exceptional equipment wear protection
- High-performing lubricating wear strength
- Reduced foaming and fluid loss

ProTec AIREND OIL	
SIZE	PART NO.
1 Gallon	36899698
5 Gallons	36899706
55 Gallons	36899714
275 Gallons (Tote)	36899722

XHP605 is a hydrocarbon-based synthetic lubricant, using a patented process, designed and approved for Bobcat compressors operating above 300 psi. With its high level of purity and refinement, along with unique additives, this lubricant provides a high viscosity index, high flash point and a low pour point.

- Your best choice for high operating temperatures – providing outstanding thermal and oxidation stability
- Low volatility and lower evaporation loss means reduced oil consumption
- Prevents excessive carryover into service air

XHP605 AIREND OIL	
SIZE	PART NO.
5 Gallons (Red Plastic Pail)	22252076
55 Gallons (Red Drum)	22252050

XHP405 is an exclusive Bobcat lubricant created and approved for all makes of rotary screw compressors operating above 300 psi.

- Low carbon tendencies minimize sludge and deposits
- Excellent protection against rust and oxidation
- XHP 405 passed the acute aquatic toxicity (LC-50) criteria adopted by the U.S. Fish and Wildlife Service and the U.S. EPA

XHP405 AIREND OIL	
SIZE	PART NO.
5 Gallons (Red Plastic Pail)	22252126
55 Gallons (Red Drum)	22252100

BOBCAT ENGINE OIL

Bobcat engine oil is designed to provide superior protection in diesel and gasoline engines. The anti-wear additive safeguards the engine from valve and lifter damage under severe loading conditions, while the alkalinity delivers protection from acids formed by oxidation and heavy-duty service. Bobcat engine oil satisfies the critical lubrication needs of the most modern engine while continuing to excel in pre-1999 diesel engines.



BOBCAT ENGINE OIL

SIZE	PART NO.
1 Gallon	54480918
5 Gallons (Pail)	36875938
55 Gallons (Drum)	36866903

*Bobcat 15W-40 engine oil meets or exceeds the following requirements:
API service CH-4, CI-4, CG-4, CF, SJ, SL. ACEA E7*

Bobcat Premium Tier 4 Engine Oil

Bobcat 15W-40 Tier 4 diesel engine oil delivers the highest performance for the most severe on- and off-highway applications. Specially formulated for extra high performance in Tier 4, low emission engines, including those with exhaust gas recirculation (EGR) and aftertreatment systems with diesel oxidation catalysts (DOCs) and diesel particulate filters (DPFs).

PERFORMANCE FEATURES:

- Patented additive technology helps reduce ash deposits while delivering outstanding oxidation and wear performance
- One oil for mixed fleets: 100% backwards compatible for engines with or without emissions control devices
- Component compatibility provides long life to critical components such as aftertreatment systems
- Shows outstanding performance in the ability to handle soot efficiency and longer engine life
- Superior low-temperature pumpability offers faster oil flow and reduced engine wear
- Excellent thermal and oxidative stability to minimize sludge buildup and deposits
- Stay-in-grade sheer stability maintains viscosity in severe, high temperatures
- Outstanding protection against abrasive and corrosive wear

BOBCAT PREMIUM TIER 4 ENGINE OIL

SIZE	PART NO.
1 Gallon	46557017
5 Gallons (Pail)	46557016
55 Gallons (Drum)	46557015

Bobcat 15W-40 Tier 4 certified engine oil meets or exceeds the following requirements: API service classification CJ-4, CI-4 PLUS, CH-4, CI-4, CF/SM, SL. API Service CF-2. ACEA E7/E5. Caterpillar ECF-3. Cummins CES 20081. Detroit Diesel Power Guard Oil Specification 93K218. API SM specification for gasoline engines

LUBRICANTS

PNEUMATIC TOOL ANTI-FREEZE LUBRICANT

Kilfrost prevents freezing of pneumatic equipment. It provides superior lubrication of working surfaces and is easily fed by airline lubricators, used in oil reservoirs or introduced by an oil can. Kilfrost SHOULD NOT be mixed with ordinary tool oils. Tool reservoir MUST be emptied before use so deicing properties are not impaired.

KILFROST PNEUMATIC TOOL ANTI-FREEZE LUBRICANT* CONFORMS TO THE FOLLOWING PHYSICAL CONSTANTS:

Specific Gravity at 60°F | 1.076
Density, Pounds Per Gallon | 8.964
Viscosity, SUS at 100°F | 300
PH Value (50:50 mix with water) | 8.2

Pour Point | -20°F
Color ASTM | 3 1/2 - 4 1/2
Cast Iron Chip Rust (50:50 mix with water) | Negative



KILFROST		
DESCRIPTION	SIZE	PART NO.
24 per case	1 Pint	35379718
4 per case	1 Gallon	35379726

**Kilfrost is a synthetic lubricant which combines permanently with water. However, its lubricating ability is independent of water content. Kilfrost is non-corrosive, non-toxic and non-flammable. The use of Kilfrost pneumatic tool anti-freeze lubricant has been approved by leading manufacturers of pneumatic equipment throughout the world. Bobcat Company is not responsible for misuse and/or misapplication of this product.*

ADVANCED COOLANT

Bobcat advanced coolant is an ethylene glycol (EG) coolant formulation that exceeds the standards for coolant performance for corrosion testing, water pump cavitation and deposit formation. Phosphate-enhanced organic acid technology is used for added engine protection.



ADVANCED COOLANT		
DESCRIPTION	SIZE	PART NO.
Concentrate	1 Gallon	46908446
Pre-Mix	1 Gallon	46908445
Pre-Mix	55 Gallons	46908448



Machine: PL65

PROTECTION PLUS EXTENDED WARRANTY – CONFIDENCE BEYOND THE STANDARD

Bobcat portable power equipment is built on a legacy of over 120 years of durability and trusted performance. The Protection Plus® extended warranty takes that reliability even further with extended coverage designed to meet the challenges of your work.

Why Choose Protection Plus?

- **Comprehensive Coverage**
Extend your protection beyond the standard warranty with coverage options of up to 60 months or 7,000 operating hours. This ensures your investment remains protected long after the initial purchase.
- **No Deductibles**
Every warrantable repair is covered – parts and labor – with no out-of-pocket deductibles, reducing your exposure to unexpected costs.
- **Increased Resale Value**
Machines with active Protection Plus coverage command higher resale value, assuring potential buyers of consistent care and maintenance.
- **Transferable Coverage**
Selling your equipment? Transfer any remaining coverage to the new owner for a minimal fee, making your equipment more appealing to buyers.
- **Nationwide Service Network**
Access warranty repairs at any authorized Bobcat portable power dealer in the U.S. or Canada, ensuring reliable service wherever your work takes you.



Tailored Protection That Works as Hard as You Do

The Protection Plus extended warranty combines peace of mind with flexibility, offering tailored coverage options to fit your needs while ensuring long-term machine performance with expert support and genuine Bobcat parts.



Scan to learn more!

Access the full Protection Plus extended warranty brochure for detailed terms, conditions and coverage details by scanning the QR code:



PARTS & SERVICE



Backed by the most extensive dealer network, Bobcat has over 350 dealer locations in North America to get you the equipment, service and support you need to get your job done!



Oil, Filters & Airend Fluids

Protect your investment in quality equipment with genuine OEM parts. Your Bobcat dealer is your source for the highest-quality parts, filters and lubricants for your Bobcat portable power products.



Remanufacturing Program

For like-new performance and reliability at the lowest cost, get Bobcat REMAN parts. These parts are fully restored to Bobcat performance specs, and they have the same warranty as new Bobcat parts.



*Bobcat will buy
your used airends!*

Airend Exchange Program

The objective of the airend exchange program is to provide a variety of solutions to your needs while also supplying you with competitive advantages.

- **Quality:** Remanufactured airends are built by trained and experienced technicians.
- **Reliability:** All airends are built to original factory specifications with OEM parts.
- **Performance:** All airends are upgraded with newest technology to ensure optimum performance.
- **Availability:** Best in the industry.
- **Warranty:** 5-year/10,000-hour extended warranty available. Second to none.
- **Support:** Prompt and professional aftermarket parts and service support.

Online Parts


Easy online ordering, and fast delivery now available with **shop.Bobcat.com!**



Create your account and gain immediate access to over 15,000 genuine Bobcat parts and have them shipped directly to your home or business.



Certain specification(s) are based on engineering calculations and are not actual measurements. Specification(s) are provided for comparison purposes only and are subject to change without notice. Specification(s) for your individual Bobcat equipment will vary based on normal variations in design, manufacturing, operating conditions, and other factors.



Bobcat Company is a member of the Doosan Group. Doosan is a global leader in construction, grounds maintenance and material handling equipment, power and water solutions, and engineering that has proudly served customers and communities for more than a century. Bobcat®, the Bobcat logo and the colors of the Bobcat machine are registered trademarks of Bobcat Company in the United States and various other countries. ©2025 Bobcat Company. All rights reserved.

BOBCAT COMPANY • 250 EAST BEATON DRIVE • WEST FARGO, ND 58078 • BOBCAT.COM

DOOSAN

P073 (02/25)
EP-XX-0225-18828-F